

THE ORIGINAL **TOPSTAR™ SCREW** FASTENING SYSTEM




The patented adjustable screw replaces shimming and can make door hanging a one person job.

Ideal for anything where you need precise adjustments.
Windows, Ceilings, Doors, Floors and Cabinets


Easy 4 Step Wood to Wood Installation

1.

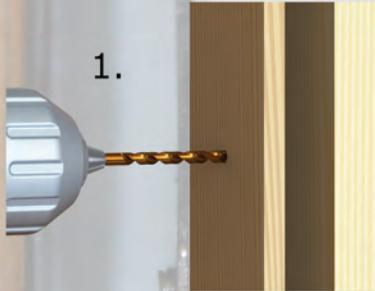


1. Predrill window frame/ door jamb (only) with 5/16" drill bit.

2.

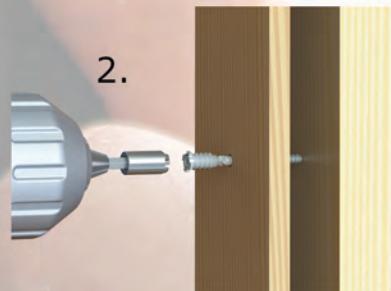


2. Engage crown bit into TopStar™ screw head and drive flush to surface of frame or jamb.

3.

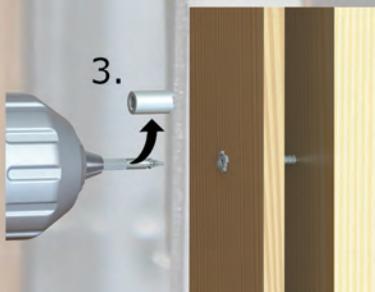

3. For adjustments remove crown from bit.

4.

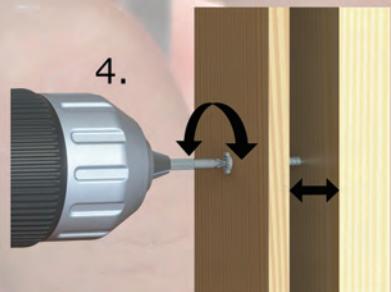

4. Engage bit into center hole of TopStar™ screw head and adjust to your requirements.



Available in 2-1/2", 3-1/8" and 4" length.
(For other lengths please call)



Crown Bit

855-895-7096

u2fasteners.com

info@u2fasteners.com



TOPSTAR™ ADJUSTABLE SCREW

The Sleeve

- Free Spinning Sleeve
On Top Of The Screw Core

Reamer Thread

- Enlarges The Hole Created By The Screw
For Easier Transition To The Upper Sleeve

CROWN BIT™

Blade Cutting Thread

- Cuts A Smooth Path Into
Natural Or Synthetic Materials
- Provides The Connection With
A High Withdrawal Resistance

Type 17 Cut

- Sharp Point Groove
To Capture Chips



Two-Piece Crown Bit

- Engages Both The Sleeve Section That Surrounds
The Screw Head And The Screw Core Simultaneously,
Turning Both Until The Sleeve Sits Flush
- By Removing The Outer Crown Portion Of The Bit,
You Can Then Turn The Main Star-Drive
To Adjust Plumb Or Level